**Technical information** 

mountain larch

changes in shape **Tongue and groove** 

against direct rain

twisting of the grips

Order No. 3.67505

Order No. 3.67506

Order No. 3.67515

Order No. 3.67516

(small deviations possible)

**Dimensions** 

Height

Width

Height

Width

Height

Width

Height Width

Core-free

Equipment made of non-impregnated

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired

Tongue and groove planks made of 4 cm solid wood, highly resilient, no trickling of dust / sand, protection

For more detailed explanation of the quality characteristics see price list. Professional climbing grips made of a mixture of sand-synthetic resin with safe anti-rotation system against unintended

2.00 m

2.00 m

2.00 m

2.40 m


2.30 m

2.00 m

2.30 m

2.40 m



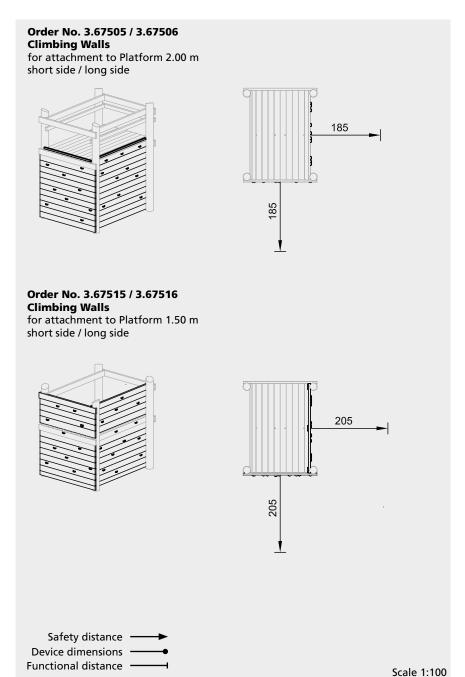

Safety check according to DIN EN 1176

# **Components**

# Order No. 3.67505

1 Climbing wall with 8 climbing grips

## Order No. 3.67506

1 Climbing wall with 11 climbing grips

## Order No. 3.67515

1 Climbing wall with 10 climbing grips

# Order No. 3.67516

1 Climbing wall with 13 climbing grips

## Installation information

Surfacing requirements corresponding to a fall height of **Order No. 3.67505 / 3.67506**  $\leq$  2.00 m **Order No. 3.67515 / 3.67516**  $\leq$  3.00 m (please refer to price list for more detailed information)

### Attention:

**Exact measurements may vary;** for all installation dimensions refer to current assembly instructions. Technical changes reserved.










3.67505


3.67516 3.67515

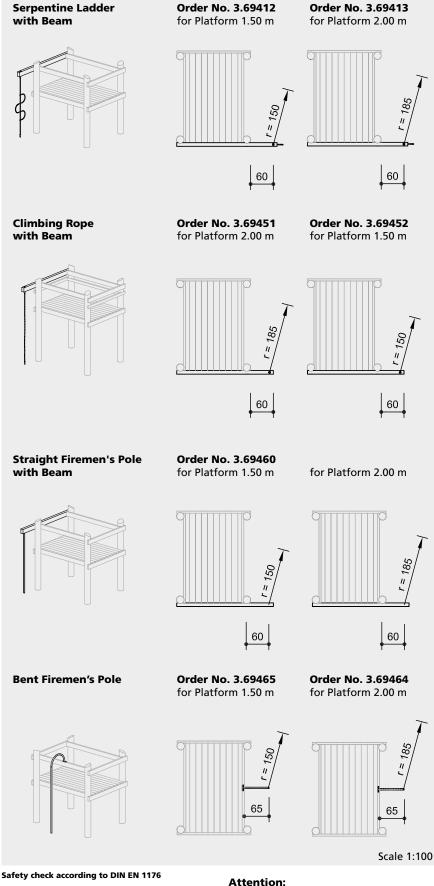

Exact measurements may vary; for all installation dimensions refer to current assembly instructions. Technical changes reserved.









**Technical information** 

### Order No. 3.69412 / 3.69413 / 3.69451 / 3.69452

#### Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



# **Richter Hercules type rope**

Richter Hercules type rope, a combination of galvanised six-strand steel cables and polyester yarn, diameter > 20 mm, laid and glued with very good abrasion resistance, strong sheathing even in the case of damage by puncturing



#### Rope connection fixed

Fixed rope connection without dangerous openings. Screw connection adjustable and countersunk in the wood



### Chains

Chains made of hot-dip galvanized steel (1.4301 / 1.4571 at extra charge) welded before galvanising, short-linked, without eyelets on the connecting parts, easy to exchange and shorten



Standard colour rope: rainbow

#### Order No. 3.69460

#### Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



#### **Ground anchor**

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



## Order No. 3.69464

## **Ground anchor**

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



For more detailed explanation of the quality characteristics see price list.

Firemen's poles made of stainless steel, glass bead blasted, Ø 42 mm

## Components

## Order No. 3.69412 / 3.69413

1 Serpentine Ladder with beam and chain as anchoring to the ground each

## Order No. 3.69451 / 3.69452

1 Climbing rope with beam and chain as anchoring to the ground each

# Order No. 3.69460

1 Straight firemen's pole with beam

## Order No. 3.69464

1 Bent fireman's pole

## **Installation information**

Surfacing requirements fall height determined by platform height (please refer to price list for more detailed information)

## **Foundations**

**Order No** 3.69412 / 3.69413 / 3.69451 / 3.69452 1 item 30 x 30 x 30 cm

Excavation depth 50 cm Order No 3.69460 / 3.69464

1 item 30 x 30 x 30 cm Excavation depth 60 cm