

**Play value**

Our Climbing Stack, made of debarked round timber, attracts attention and interest even from a distance. Thanks to different levels, large numbers of children can play together in a small space: the Climbing Stack allows for a flowing play rhythm even if lots of children spontaneously want to play. The Climbing Stack isn't just for climbing, experiencing heights and exploring the senses using hands and feet, it's also an attractive seating area, where the children can rest, chat and observe.



*Special version with installed suspension bridge*



*Special version with installed suspension bridge*

**Climbing Stack 3**

**Fundamental characteristics**


- Impressive design statement
- Very special appeal
- Attractive meeting point
- No pre-determined play procedures, also able to be used as stands for spectators, individual mastering
- Incentive for playing: experiencing height
- Movement: climbing up and around, balancing

**Recommended for**

- School children
- Young people
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar



4.21030

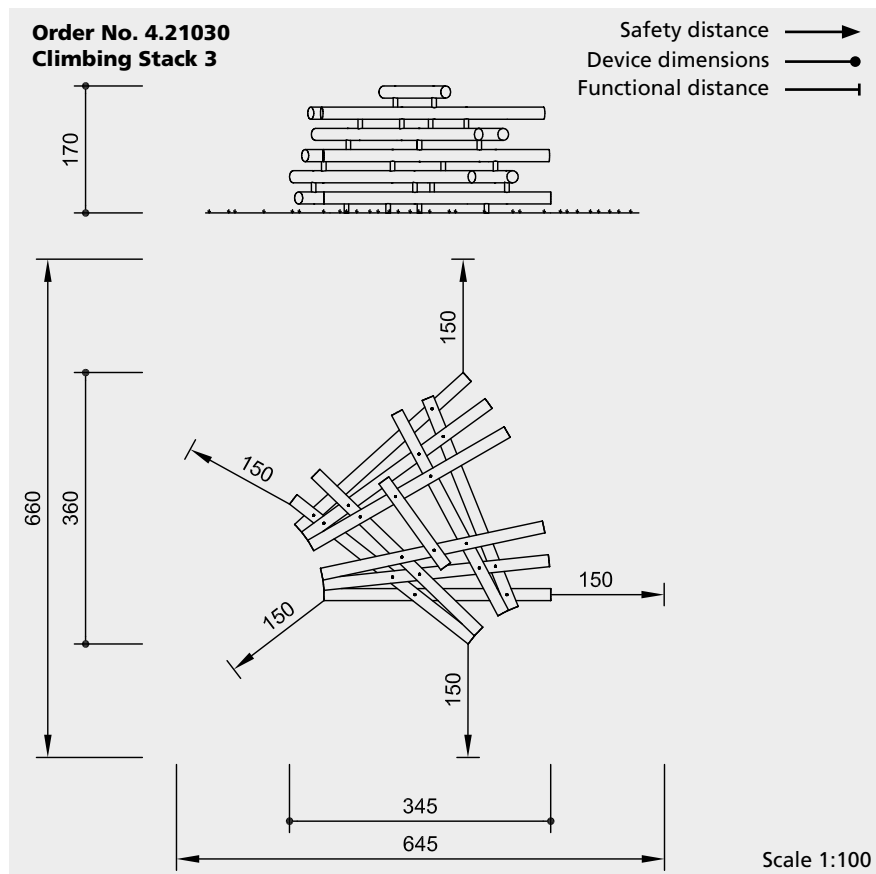

Safety check according to DIN EN 1176

#### Components

11 Round logs  
with 4 steel feet

#### Installation information

Surfacing requirements  
corresponding to a fall height of  $\leq 2.00$  m  
(please refer to price list for more  
detailed information)

Foundations  
4 items 50 x 50 x 50 cm  
Excavation depth 70 cm

**Attention:**  
**Exact measurements may vary;**  
**for all installation dimensions refer**  
**to current assembly instructions.**  
Technical changes reserved.

#### Technical information

Equipment made of non-impregnated  
mountain larch

#### Peeled white

Palisades peeled white means that bark,  
cambium and sapwood are removed,  
the natural shape of the trunk is  
preserved and can be experienced



#### Profiled washer

Profiled washer for covering protruding  
screw heads according to standard,  
improved pressure distribution and  
protection against water. Impedes  
loosening the bolt



#### Ground anchor

All parts used for anchoring to the  
ground are made of hot-dip galvanised  
steel or stainless steel



#### Relief cut

Targeted relief cut as an effective measure  
against cracks caused by drying.  
The cut defines the position of the stress  
equalization in the trunk and minimises  
natural cracking




**For more detailed explanation of the  
quality characteristics see price list.**

#### Dimensions

(small deviations possible)

Height	1.70 m
Length	3.45 m
Width	3.60 m
Weight	650 kg



4.21030