

# Instructions for wear checks of play equipment

The equipment must be checked for correct operation and safety, especially the points listed below:

Proof of maintenance

Playground .....

Date of installation .....



Checks depend on the type of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year.

Intervals for maintenance work and checks generally depend on


- location
- kind of use
- frequency of use
- possible vandalism

For more details see also "General instructions for maintenance of playgrounds".

## Small Triple Swing special Order No. 6.14820

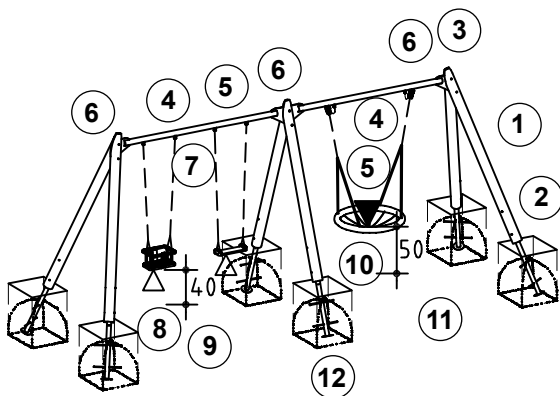

**Note**  
The first chain link must be firmly locked.

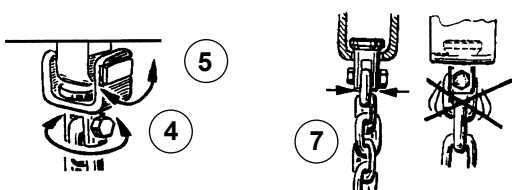

### Wooden parts

1. Check for rot and, if necessary, smooth out splinters and round off sharp edges of cracks.
2. Check that all bolts and screws are tight and retighten if necessary; grind/cut off protruding bolt ends, regalvanise with zinc spray.
3. Recommendation: apply paraffin wax to the end grain areas once a year, especially near the ground; please refer to order No. 0.90100, 1 litre.

### Swing suspension

4. Make sure that the joints move smoothly.
5. Make sure that the swivels move smoothly, apply grease if required.
6. Check welds of metal cross beam for cracks.
7. Check chain and connection to chain; the first chain link must be locked firmly in the swivel; check wear on contact surfaces between first and second chain link.

### Swing seat

8. Replace if metal parts are exposed.
9. Check the seats for a ground clearance of 40 cm.

### Swallow's nest

10. Check for damage and for wear and tear, replace if necessary.
11. Check the height (top edge = 50 cm) of the swallow's nest.

### Structural stability

12. In order to check the steel feet for corrosion, uncover the foundations once a year.

Repair not carried out, it is still possible to play on equipment

Repair not carried out, equipment is taken out of action

All work carried out, everything is in order


Maintenance carried out by:

For spare parts refer to back of page.















..... Date .....

Special notes, e.g. for repairs

**Spare Parts  
Small Triple Swing  
special  
Order No. 6.14820**



Please note that the safety standards of the equipment must not be affected. Therefore, when carrying out repairs it is helpful to **only use original parts.**

Order No. Spare part of swing seat	Order No. Spare part of swallow's nest and Toddler's swing seat
<p><b>0.93000</b> rubber swing seat</p> 	<p><b>0.86200</b> swallow's nest without joints</p> 
<p><b>0.93010</b> rubber swing seat with 4 eyebolts</p> 	<p><b>0.86201</b> swallow's nest with joints and chains</p> 
<p><b>0.93020</b> rubber swing seat with 2 V-chains</p> 	<p><b>0.20012</b> stainless steel machine bolt M12x70 reinforced, with locking nut</p> 
<p><b>0.93021</b> V-chain</p> 	<p><b>0.88193</b> square block bar, reinforced with 2 brass bushes</p> 
<p><b>0.93090</b> U-shackle with swivel</p> 	<p><b>0.88140</b> brass bush</p> 
<p><b>0.88150</b> brass bush for swing joint</p> 	<p><b>0.93080</b> Toddler's swing seat with chains</p> 
<p><b>0.20010</b> stainless steel machine bolt M8x55 with locking nut</p> 	<p><b>0.93081</b> Toddler's swing seat without chains</p> 
<p><b>0.20020</b> stainless steel machine screw M8x28 with locking nut</p> 